SHALLOW BUCKETS DIN 15231

FOLDED

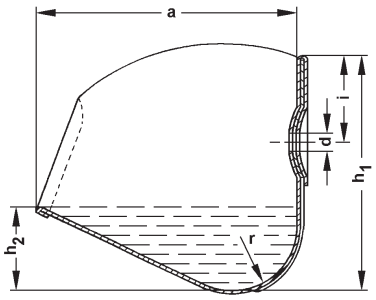

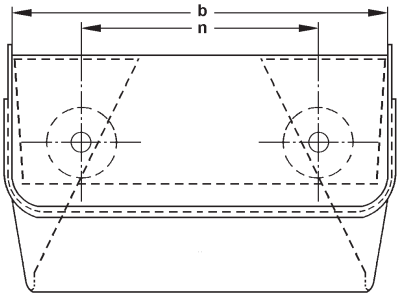

b mm	a mm	h_1 mm	h_2 mm	r mm	Capa-city dm³	max. number buckets per m	Standard punching moulded recessed holes d mm	n mm	i mm	No.	Weigth kg/100 pcs. at sheet-thickness of mm 1	1,5	2
80*	70	67	24	19	0,10	8	8	43	25	2	17,5		
90	80	70	26	21	0,13	8	8	48,5	22	2	21,5		
100*	90	80	28	23	0,16	6,5	8	55	25	2	26	39	
110	95	85	30	24	0,21	6	8	64	25	2	29	43,5	
120	105	95	34	25	0,26	6	8,5	67	29	2	34	51	
125*	106	95	34	27	0,28	5,5	8,5	75	32	2	36,5	54,5	
140	115	105	36	29	0,38	5	8,5	86	30	2	45	67,5	90
150	120	110	38	30	0,44	4,5	8,5	90	30	2	49	73,5	98
160*	125	112	40	32	0,50	4,5	8,5	101	40	2	53,5	80	107
180	135	120	42	34	0,65	4,5	10,5	125	31	2	67	100,5	134
200*	140	125	45	36	0,80	4	10,5	125	45	2	77	115,5	154
220	150	132	48	38	0,98	4	10,5	2×70	47	3	96	144	192
250*	160	140	50	40	1,25	4	10,5	2×77	50	3	113	170	226
300	180	160	56	44	1,83	3,5	10,5	2×105	54	3	125	187,5	250
315*	180	160	56	45	2,00	3,5	10,5	2×112	56	3	141	212	282
350	190	170	58	47	2,25	3	10,5	3×90	55	4	at 2,5 mm		350

*Dimensions according to DIN 15231 except standard punching.

Special punching on request.
All statements are not binding, technical alterations subject to change.

FOR CONVEYING OF	Flour, powdery goods
FOR USE AT	Silos, mills, feed mills, malt- sugar- and foods industry, chemical industry
MATERIAL	mild steel, stainless steel (DIN 1.4301 / 1.4571 - AISI 304/316Ti)
COATINGS	enamelled, plastic-coated, galvanized

Paul Hedfeld GmbH
Hundeicker Str. 20
D-58285 Gevelsberg

Telefon +49 (0) 2332 63 71
Fax +49 (0) 2332 6 11 67

www.hedfeld.com
hedfeld@hedfeld.com