SHALLOW, ROUNDED BUCKETS DIN 15232

FOLDED

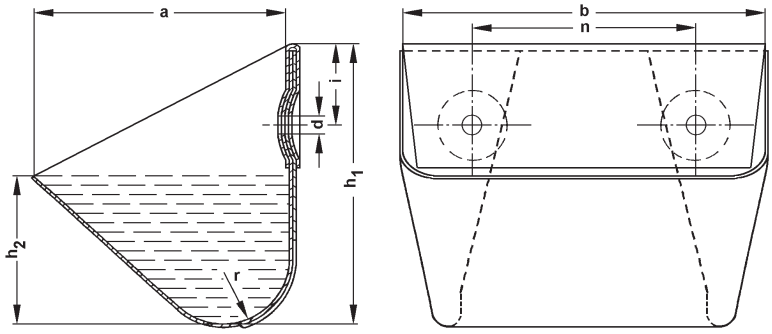

b mm	a mm	h_1 mm	h_2 mm	r mm	Capa-city dm^3	max. number buckets per m	Standard punching moulded recessed holes d mm	n mm	i mm	No.	Weight kg/100 pcs. at sheet-thickness of mm 1	1,5	2
80*	75	80	43	19	0,16	10	8	43	20	2	20,5		
90	85	90	45	21	0,22	9	8,5	48,5	22	2	22		
100*	90	95	50	23	0,26	8,5	8,5	54,5	25	2	29	43,5	
110	95	105	55	24	0,36	8	8,5	64	25	2	33,5	50	67
120	105	112	60	26	0,48	8	8,5	67	29	2	39,5	59	79
125*	106	112	60	28	0,50	7	8,5	75	32	2	41	61,5	82
140	115	120	65	29	0,59	6,6	8,5	86	30	2	52,5	78,5	105
150	120	125	65	30	0,76	6	8,5	90	30	2	53,5	80	107
160*	125	132	71	32	0,91	5,5	8,5	80	40	2	58,5	87,5	117
180	130	140	75	34	1,14	5,5	10,5	125	31	2	66	100	132
200*	140	150	80	36	1,37	5	10,5	125	45	2	77	115	154
220	150	160	85	38	1,77	5	10,5	2×70	47	3		155	185
250*	160	170	90	40	2,14	5	10,5	2×77	50	3		172,5	230
300	180	190	100	44	2,80	4,5	10,5	2×105	54	3		215	287

*Dimensions according to DIN 15232 except standard punching.

Special punching available on request.

All statements are not binding, technical alterations subject to change.

FOR CONVEYING OF	Grain, rape seed, granular goods, glas beads, steel-shot
FOR USE AT	Silos, mills, feed mills, malt- sugar- and foods industry, foundry industry
MATERIAL	mild steel, stainless steel (DIN 1.4301 / 1.4571 - AISI 304/316Ti)
SPECIAL DESIGN	with front or three-sided edge reinforcement
COATINGS	enamelled, plastic-coated, galvanized

Paul Hedfeld GmbH
Hundeicker Str. 20
D-58285 Gevelsberg

Telefon +49 (0) 2332 63 71
Fax +49 (0) 2332 6 11 67

www.hedfeld.com
hedfeld@hedfeld.com